


BCWS APPROVED FRAME/COVER



NOTE:
SHELF EDGE TO HAVE
3/4" ROUND


PROVIDE OPENING IN EXISTING WALL FOR
NEW FORCE MAIN. OPENING SHALL BE
CORED. PIPE SHALL BE SEALED WITH BOOT
AND NON SHRINK GROUT.

PROPOSED FORCE MAIN TO
TIE-IN AT INVERT ELEVATION
(INSIDE DROP ALLOWED PER
BCWS REVIEW)

BOOT CONNECTION REQUIRED

NOTE:

1. RECEIVING MANHOLE AND NEXT
DOWNSTREAM MANHOLE SHALL BE
COATED WITH APPROVED EPOXY
PROTECTIVE COATING BELOW THE
FRAME ALL THE WAY TO THE
FLOW LINE OF MH.
2. ADDITIONAL MANHOLES IN
PROXIMITY TO RECEIVING MANHOLE
MAY REQUIRE COATING WHEN
DIRECTED BY BCWS.
3. ALL MANHOLES COATED WITH
EPOXY COATING SHALL HAVE
COMPOSITE FRAME AND COVERS
INSTALLED
4. TRACER WIRE BOX TO BE
INSTALLED 10' FROM RECEIVING
MANHOLE.

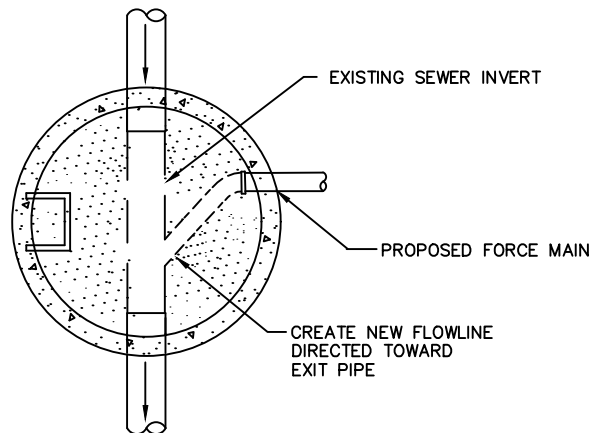

***NEW FORCE MAIN TO
EXISTING MANHOLE CONNECTION***

NOT TO SCALE

SEWER PANEL 2C

**BERKELEY COUNTY WATER AND SANITATION
POTABLE WATER & SANITARY SEWER STANDARDS**

REVISED 04/25/23