



NOTE: MACHINED BEARING SURFACES BETWEEN COVER & FRAME.

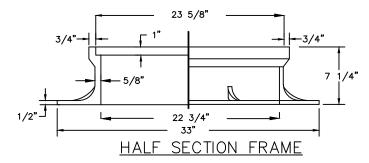



- NOTE:
  1. USE WATERTIGHT FRAME AND COVERS WHERE MANHOLES ARE LOCATED IN PAVEMENT OR SIDEWALK, AREAS AFFECTED BY STREET RUNOFF OR BELOW THE 50 YEAR FLOOD ELEVATION.
- SEE APPENDIX F29 BCWS APPROVED PARTS LIST FOR APPROVED FRAMES AND COVERS.
- MANHOLE COVERS ARE TO BE INSTALLED COMPLETELY WITHIN OR COMPLETELY OUT OF PAVED AREAS
- (INCLUDING SIDEWALKS). ALL EPOXY COATED MANHOLES SHALL BE EQUIPPED WITH COMPOSITE FRAME AND COVERS.

TYPICAL MANHOLE FRAME AND COVER

## **SEWER PANEL 2H**

## BERKELEY COUNTY WATER AND SANITATION POTABLE WATER & SANITARY SEWER STANDARDS

REVIEWED 04/25/23